QUADRO™

QUADRO™ offers high level comfort and wide angle vision in a versatile frame. The side arms can easily be removed and replaced with the head strap to provide an enhanced fit in challenging conditions.

SPECIAL FEATURES

- Sports style design
- Single piece panoramic lens
- Soft comfort TPE inserts on temple ends
- Washable, soft TPE/foam inner frame seal provides a close, comfortable facial fit
- Side-arms can be removed and easily replaced by the enclosed head strap
- Supplied with a microfibre storage pouch

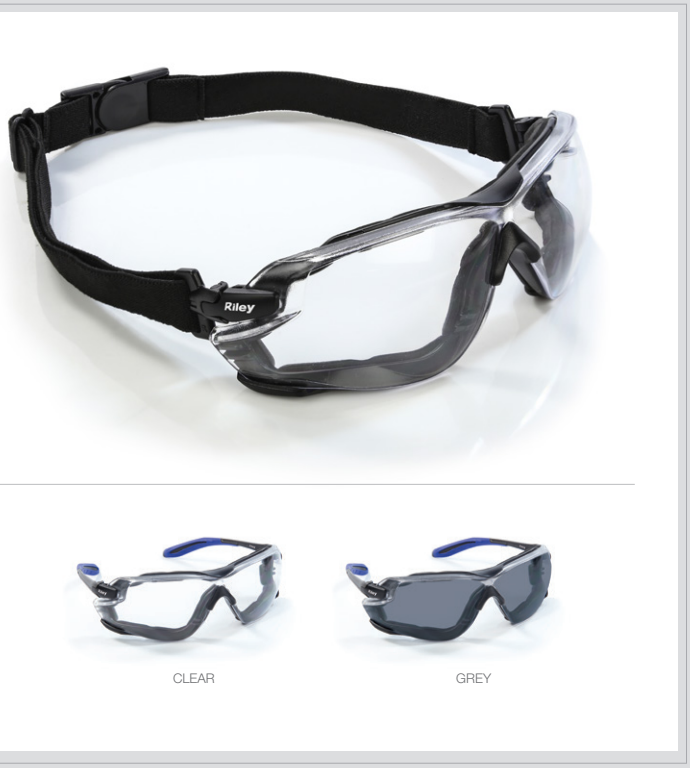

CLEAR

GREY

SOFT TPE

PANORAMIC VISION

SPORTS STYLE

VERSIONS	REF.	LENS MARKING	FRAME MARKING	PROTECTION AGAINST	COATINGS
CLEAR	RLY00311	2C-1.2 ℮ 1FTKN CE	℮ EN 166 FT CE	Impacts, UV radiations	TECTON 400 K&N Anti-scratch and Anti-fog / UV400 / Moisture repellent
GREY	RLY00312	5-2.5 ℮ 1FTKN CE	℮ EN 166 FT CE	Impacts, UV and solar radiations	

See overleaf for this product's technical specification ····►

QUADRO™

Riley

GENERAL SPECIFICATION

LENS BASE	8mm
WEIGHT	31g

PACKAGING

Individually contained in a polythene bag with a Euroslot

PER BOX	10
PER CARTON	200

COMPONENT SPECIFICATION

COMPONENT	MATERIAL	FEATURES
LENS	Polycarbonate	Single piece panoramic lens
NOSE BRIDGE	Thermoplastic Elastomers (TPE)	Comfortable and flexible
TEMPLE	Nylon/Thermoplastic Elastomers (TPE)	Co-injected - Soft and comfortable
HINGE	Nylon	Durable

LENS MARKINGS

LENS FILTER TYPE:
2C UV
5 Solar

SCALE NUMBER (SHADE):
1.2 Clear or Amber
2.5 Grey

ℯ Identity of the manufacturer

OPTICAL CLASS:
1 High optical quality

MECHANICAL STRENGTH:
F Low energy impact, resists a 6mm, 0.86g ball at 45m/s
T Protection against high-speed particles at extreme temperatures

PERFORMANCE:
K Resistance to scratches by fine particles
N Resistance to fogging

CE Certification mark

FRAME MARKINGS

ℯ Identity of the manufacturer

EN 166: guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc.

MECHANICAL STRENGTH:
F Low energy impact, resists a 6mm, 0.86 g ball at 45 m/s
T Protection against high-speed particles at extreme temperatures

CE Certification mark

CLEANING AND STORAGE

CLEANING: The lenses should be cleaned regularly.

MAINTENANCE: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfibre pouch or rigid case.

STORAGE: All products must be stored in a dry and clean environment.

PART OF THE GLOBUS GROUP

Based on a substantial heritage of successfully protecting hands, Globus has grown to become one of the world leaders in worker safety, leading the way in technical innovation to provide a range of products that have set the standard for safety, productivity and wearer acceptance.

This focus on creating cutting edge personal protection solutions has now extended to eye and face protection with Riley; a new collection of high performance protective eyewear products engineered with innovation and ingenuity, designed for optimum comfort and styled for safe working.

Riley product approval certificates to CE standards will be provided on request. Riley is a registered trademark.

www.riley-eyewear.com

E: info@riley-eyewear.com
T: +44 (0)161 877 4747
F: +44(0)161 877 4746

Globus (Shetland) Ltd, 14 Central Park, Mosley Road, Manchester, M17 1NY, UNITED KINGDOM

Globus GROUP

EC-Type certification issued by:
0530: CERTOTTICA SCARL, Zona Industriale Villanova, 32013 - Longarone (BL), Italy
0194: INSPEC, 56 Leslie Hough Way, Salford, Greater Manchester, M6 6AJ, United Kingdom
The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment.
The manufacturer reserves the right to make any modifications it deems necessary.

© 2017 Globus (Shetland) Ltd | RILEY-DATA-QUADRO-0717_1