RO1547

Stormbuster Classic Waterproof Bomber

TICKING ALL BOXES

PROTECTION LEVEL: ARC 3

25.9 cal/m²

Above shown is the ATPV value.

BODY BURN INJURY PREDICTION

4.4%

Body burn prediction of 2nd degree burns.

EN SAFETY STANDARDS

EN ISO 13688:2013

EN 1149-5:2008

EN ISO 14116:2008
Index 3 /50H/40

EN 13034:2005
+ A1:2009 Type 6

EN ISO 20471:2013
Class 2

EN 343:2003
+ A1:2007 3/3

GO/RT 3279:2012
Orange Only

QUICK DETAIL OVERVIEW

Available colours

Orange/Navy Yellow/Navy

Product code	Sizing
RO1547	S - 4XL

Fabric weight

Bomber:	435 g/m²

This garment is mostly used in > Offshore / Renewables / Utilities / Petrochemicals / Transport

RO1547

Stormbuster Classic Waterproof Bomber

FEATURES & BENEFITS

Flame retardant retroreflective tape > Stay visible in any situation

Detachable FR winter liner > Stay warm and extra protected

2 radio/gas detector loops > Keep your instruments within reach

2 Back pockets with flap > Great rear storage

2 Side pockets with trouser access > Easy access on both sides

KEY FEATURES

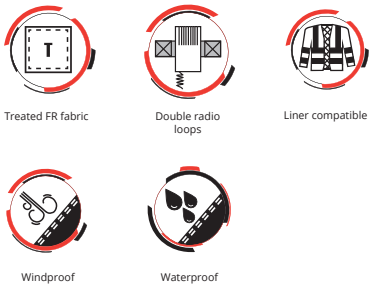

Related products

RO1503 - FR Liner
Stormbuster FR detachable liner/FR jacket
Cotton

RO1502 - FR Liner
Stormbuster FR detachable liner/FR jacket
Polyester

FABRIC INFORMATION

Fabric composition

SBCWP + FLA185 outer fabric- 99% polyester / 1% antistatic
inner fabric 100% FR cotton

Fabric weight

435 g/m²

FR Fabric Type

Treated

Additional certification

OEKO-TEX® CONFIDENCE IN TEXTILES STANDARD 100 SHWO 093194 TESTEX

UPF RATING 50+

1. Oeko-Tex Standard 100
2. AS/NZ 4399:1996 Sun protective clothing
   UPF 50+ (Excellent Protection)

Logo

Certified for logo applications

Please visit **www.roots-original.com/certificates** to download all relevant certificates.

Product care instructions

To preserve the fabrics strength and protective capacity, we strongly advice to follow our detailed care instructions.

1. Always launder with coverall zippers closed.
2. Remove all tools from pockets
3. Rinse properly after wash.
4. Never wash flame retardant clothing with detergents containing bleach.
5. After washing, tumble dry at 50°C to avoid excessive shrinkage.
6. Do not iron directly over heat seal logos.

$ 7 J < A

Whenever in doubt or in need of advice, ask your dry cleaner or contact us. We are here to help or visit **www.roots-original.com/product-care**

YOUR ARC FLASH PROTECTION SPECIALISTS

Get in contact, we'd love to help you!

Give us a call on +31 (0)10 2955 955 or drop us a message at: info@roots-original.com